


Airflow regulator $\varnothing 75$ VRP75

NOVELTY

	$\varnothing 1$	$\varnothing 2$	Z
VRP75	70	59	8,1

Number of removed rings	Air flow velocity [m ³ /h]					
	10	20	30	40	50	60
	Pressure drop [Pa]					
0	9,0	31,6	69,1	119,8	186,2	269,3
1	6,0	21,4	45,9	81,3	126,9	183,0
2	3,3	12,2	26,8	46,6	71,7	104,7
3	1,5	5,8	12,9	22,7	36,1	53,5
4	0,4	1,8	3,9	7,1	11,1	17,0
5	0,2	0,5	1,0	1,9	2,9	4,0

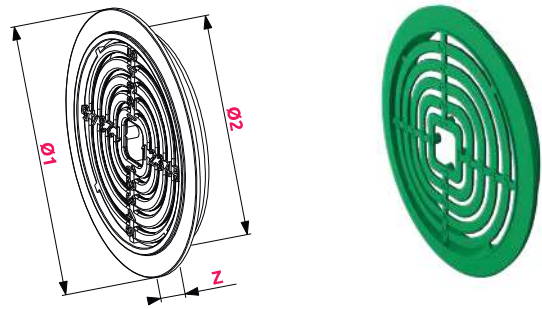

Coupling VM75, VM90

Couplings made of HDPE material in black are available for joining VFG* / VFB* ducts. The couplings provide fast, durable and break-resistant duct connections. The duct connection is tight thanks to the possibility of using the VU75 or VU90 gaskets.

NOVELTY SYSTEM $\varnothing 90$ 

End caps VZ75-5, VZ90-5

End caps protect ducts from any contamination during transport, storage and the system from possible contamination during installation. They are made of polyethylene PE.

NOVELTY SYSTEM $\varnothing 90$ 

Gaskets VU75-5, VU90-5

Specially designed gaskets ensure a tight connection between ducts as well as between duct and manifolds and plenum boxes. The gasket is placed on the ducts between the "humps". They are made of polyurethane PUR.

NOVELTY SYSTEM $\varnothing 90$ 

Duct cutter $\varnothing 75, 90$ VNK75R, VNK75G, VNK90R, VNK90G



A cutter for ducts with a diameter of 75mm or 90mm allows for precise trimming to get your duct a desired length.

Precise cut will ensure a tight connection with other system components. Replaceable cutter blade extends its life span.

Duct cutter: $\varnothing 75$ VNK75R
 $\varnothing 90$ VNK90RNOVELTY SYSTEM $\varnothing 90$ Duct cutter: $\varnothing 75$ VNK75G
 $\varnothing 90$ VNK90G

Duct holder Ø 75 VH75-2

Duct holder with a diameter of 75 mm.
The holder allows you to instal the ducts both on the floor and the ceiling.

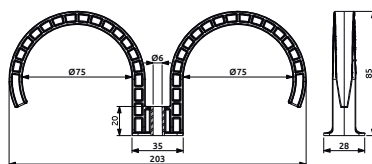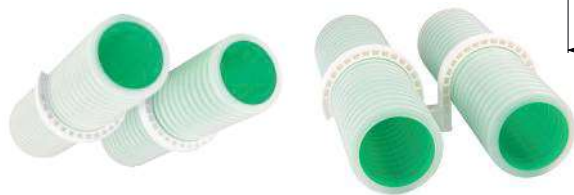

Mounting tape, perforated VTM

Perforated tape is used to suspend ventilation ducts of circular, oval and rectangular cross-section. It is ideal for installations requiring smooth height adjustment or when there is no possibility to use clamps.

Mounting openings of Ø 4 mm and 8 mm allow for mounting with threaded rods, screws, rivets or bolts.



Tape for the VZO band clamp

The metal tape allows you to create band clamps of any diameter. Special packaging makes it easy to measure the desired lengths of tape. It has properly shaped edges to prevent damage to ducts during installation. It can be toned for all types of ventilation ducts. The band clamp is installed using the VZT clamp..

VZO – Tape for band clamps

Length: 30 lm.

Width: 9 mm.

Thickness: 0.6 mm.

Material: Stainless steel.

Unit packaging: 30 lm.

Collective packing: 10 pcs.



VZT clamps for the VZO tape

VZT clamps for VZO clamp bands are made from high-quality steel, coated with a special layer to extend their lifespan for prolonged use. The unique design of the clasp allows for quick and easy opening or closing.

VZT – clamps for tape

Material: Stainless steel (lock),
galvanised steel (screw).

Unit packaging: 50 sets.

Collective packing: 10 pcs.



Aluminium sealing tape VTA

Aluminium sealing tape is used to protect connections from possible leaks. The tape is flexible so it adheres perfectly to the surface and sets very well even on uneven planes.

The tape is resistant to weather conditions including high temperatures, UV radiation and water.



Reinforced sealing tape VTZ

Aluminium tape additionally reinforced with fibres for increased strength. It has the same properties as the VTA tape. It is used to protect connections from possible leaks. The tape is resistant to weather conditions including high temperatures, UV radiation and water.

