


VZ_RZV_TL90

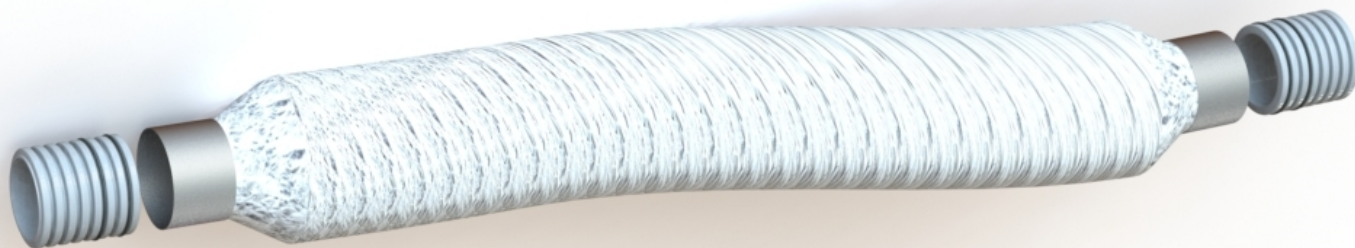


Silencer $\varnothing 90/25 \times 1 \text{ m}$

Usage

Silencer limits transmission of sound in air ducts from the ventilation unit to rooms as well as among individual rooms. When used in each route, it replaces acoustic insulation in distribution box. The silencer is made of light, flexible and acoustically insulated material. For a convenient installation use two O-rings at each end of the duct. O-rings are included in the delivery.

Dimensions

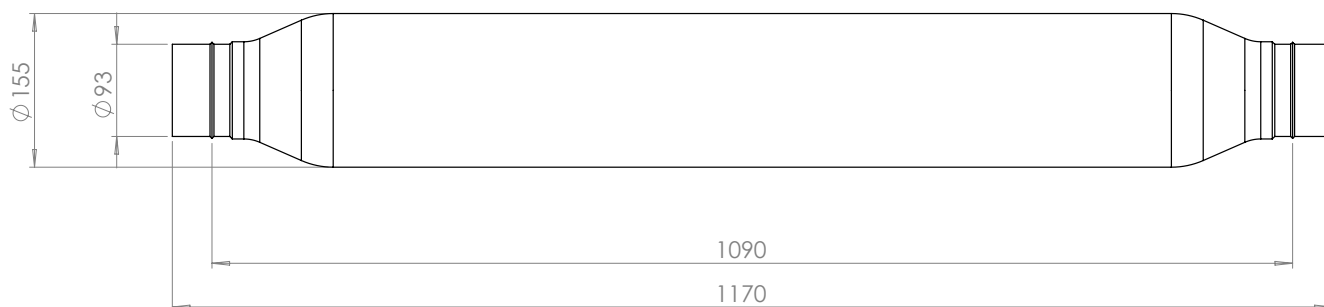

Technical details

Material: polyester, aluminium, glass fiber, stainless steel

Frequency (Hz): 63 125 250 500 1000 2000 4000 8000

Attenuation (dB): 13 17 28 35 34 38 44 22

Connector diameter: 93 mm

Any changes resulting from technical development are reserved.

Do you need additional information?
Call us: +420 775 587 595.

E-mail: info@jablotronLT.com | Web: JABLOTRONLT.COM